#### PREDICTED ENERGY ASSESSMENT




Plot 11, Land off Hawks Road, Dwelling type: House, Semi-Detached

Welton, Date of assessment: 19/07/2022 Lincoln, Produced by: Jake Eaton LN2 3BS Total floor area: 81.47 m<sup>2</sup>

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO<sub>2</sub>) emissions.

### **Energy Efficiency Rating**

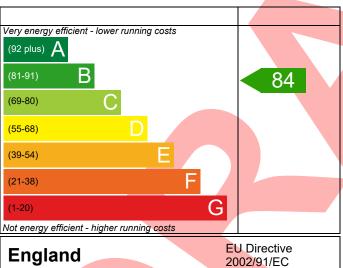

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

### **Environmental Impact (CO<sub>2</sub>) Rating**

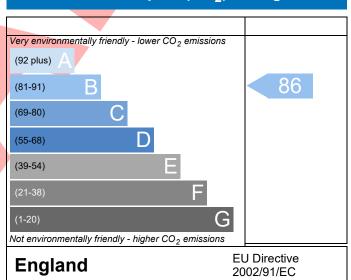

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO<sub>2</sub>) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



# **BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)**



Property Reference LN2 3BS Plot 11				Issued on Date	19/07/2022
Assessment 001		Pro	op Type Ref	Greenwich (Type B)	
Reference					
Property Plot 11, Land off Hawks	Road, Welton,	Lincoln, LN2 3BS			
SAP Rating	84 B	DER	17.81	TER	18.71
Environmental	86 B	% DER <ter< td=""><td></td><td>4.83</td><td></td></ter<>		4.83	
CO <sub>2</sub> Emissions (t/year)	1.28	DFEE	46.63	TFEE	54.19
General Requirements Compliance	Pass	% DFEE <tfee< td=""><td></td><td>13.95</td><td></td></tfee<>		13.95	
Assessor Details Mr. Jake Eaton, Jake Eaton	, Tel: 014002834	71, jake@aeratecl	h.co.uk	Assessor ID	P711-0001
Client					
SUMARY FOR INPUT DATA FOR New Build (As D	Designed)				
Criterion 1 – Achieving the TER and TFEE rate					
1a TER and DER					
Fuel for main heating	Mains ga	as			
Fuel factor	1.00 (ma	ins gas)			
Target Carbon Dioxide Emission Rate (TER)	18.71			kgCO <sub>2</sub> /m <sup>2</sup>	
Dwelling Carbon Dioxide Emission Rate (DER)	17.81			kgCO₂/m²	Pass
	-0.90 (-4	.8%)		kgCO₂/m²	
1b TFEE and DFEE					
Target Fabric Energy Efficiency (TFEE)	54.19			kWh/m²/yr	
Dwelling Fabric Energy Efficiency (DFEE)	46.63	00/)	7	kWh/m²/yr	Docs
Criterion 2 – Limits on design flexibility	-7.6 (-14	.0%)		kWh/m²/yr	Pass
Limiting Fabric Standards					
2 Fabric U-values					
		11:	ala a ak		
	<b>erage</b> 19 (max. 0.30)		i <b>ghest</b> 19 (max. 0.70	٦١	Pass
	00 (max. 0.20)	-	19 (IIIax. 0.7)	5)	Pass
	14 (max. 0.25)		14 (max. 0.70	))	Pass
	1 (max. 0.20)		12 (max. 0.3!	•	Pass
	1.40 (max. 2.00)		1.40 (max. 3.30)		Pass
2a Thermal bridging			-		
Thermal bridging calculated from linear th	hermal transmit	cances for each jun	nction		
3 Air permeability	7				
Air permeability at 50 pascals	7.00 (de	sign value)		m³/(h.m²) @ 50 Pa	1
Maximum	10.0			m³/(h.m²) @ 50 Pa	Pass
<b>Limiting System Efficiencies</b>					
4 Heating efficiency					

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

## **BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)**



Main heating system	Boiler system with radiators or underfloor - Mains gas Data from database Vaillant ecoFIT sustain 835 VUW 356/6-3 (H-GB) Combi boiler Efficiency: 89.3% SEDBUK2009 Minimum: 88.0%	Pass		
Secondary heating system	None			
5 Cylinder insulation				
Hot water storage	No cylinder			
6 Controls				
Space heating controls	Programmer, room thermostat and TRVs			
Hot water controls	No cylinder			
Boiler interlock	Yes			
7 Low energy lights		Pass		
Percentage of fixed lights with low-energy fittings	100 %			
Minimum	75 %	Pass		
8 Mechanical ventilation				
Not applicable				
Criterion 3 – Limiting the effects of heat gains in sur	nmer			
9 Summertime temperature				
Overheating risk (East Pennines)	Slight	Pass		
Based on:				
Overshading	Average			
Windows facing East	4.54 m², No overhang			
Windows facing South	1.45 m², No overhang			
Windows facing West	6.91 m², No overhang			
Air change rate	2.50 ach			
Blinds/curtains	Light-coloured curtain or roller blind, closed 50% of daylight			
Cuitavian A. Building nouformanae consistent with	hours			
Criterion 4 – Building performance consistent with Party Walls	DER dila DECE I die			
Type	U-value			
Filled Cavity with Edge Sealing	0.00 W/m²K	Pass		
Air permeability and pressure testing	0.00 W/III K	1 033		
3 Air permeability				
Air permeability at 50 pascals	7.00 (design value) m³/(h.m²) @ 50 Pa			
Maximum	10.0 m³/(h.m²) @ 50 Pa			
10 Key features		Pass		
Party wall U-value	0.00 W/m²K			
Roof U-value	0.11 W/m²K			
Roof U-value	0.12 W/m K			
Nooi o value	0.12 vv/III K			

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19