PREDICTED ENERGY ASSESSMENT




Plot 13, Land off Hawks Road, Dwelling type: House, Detached

Welton, Date of assessment: 19/07/2022
Lincoln, Produced by: Jake Eaton
LN2 3BS
Total floor area: 123.98 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

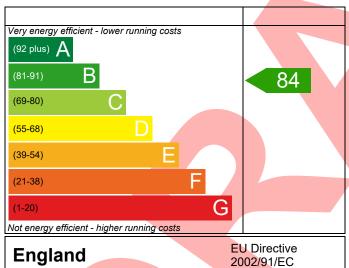

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

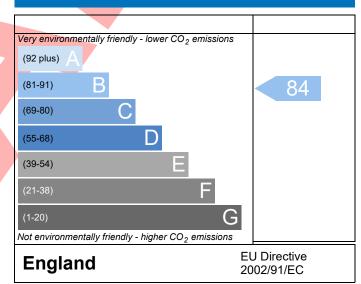

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Reference LN2 3BS Plot Assessment 001	13	Pron Tyne Ref	Issued on Date Highgrove/Gloucester	19/07/2022
Reference		Prop Type Kei	Trigrigrove/Gloucester	(туре ту
Property Plot 13, Land	off Hawks Road, Welton, Lincol	n, LN2 3BS		
SAP Rating	84 B DEF	17.47	TER	17.81
Environmental	84 B % D	DER <ter< td=""><td>1.90</td><td></td></ter<>	1.90	
CO₂ Emissions (t/year)	1.97 DFE	E 54.11	TFEE	62.90
General Requirements Compliance	Pass % D	OFEE <tfee< td=""><td>13.97</td><td></td></tfee<>	13.97	
Assessor Details Mr. Jake Eaton,	ake Eaton, Tel: 01400283471, ja	ke@aeratech.co.uk	Assessor ID	P711-0001
Client				
UMARY FOR INPUT DATA FOR New	Build (As Designed)			
riterion 1 – Achieving the TER and T	FEE rate			
a TER and DER				
Fuel for main heating	Mains gas			
Fuel factor	1.00 (mains ga	as)		=
Target Carbon Dioxide Emission Ra			kgCO ₂ /m ²	
Dwelling Carbon Dioxide Emission			kgCO ₂ /m ²	Pass
	-0.34 (-1.9%)		kgCO ₂ /m ²	
b TFEE and DFEE				
Target Fabric Energy Efficiency (TF	EE) 62.90		kWh/m²/yr	
Dwelling Fabric Energy Efficiency (DFEE) 54.11		kWh/m²/yr	
	-8.8 (-14.0%)		kWh/m²/yr	Pass
riterion 2 – Limits on design flexibili	ty			
Limiting Fabric Standards				
2 Fabric U-values				
Element	Average	Highest		
External wall	0.20 (max. 0.30)	0.28 (max. 0.7	70)	Pass
Party wall	0.00 (max. 0.20)	-		Pass
Floor	0.16 (max. 0.25)	0.18 (max. 0.7	70)	Pass
Roof	0.11 (max. 0.20)	0.11 (max. 0.3	•	Pass
Openings	1.40 (max. 2.00)	1.40 (max. 3.3	30)	Pass
2a Thermal bridging				
Thermal bridging calculated from	om linear thermal transmittances	for each junction		
3 Air permeability			_	
Air permeability at 50 pascals	7.00 (design v	alue)	m ³ /(h.m ²) @ 50 Pa	
All permeability at 50 pascuis				

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



4 Heating efficiency

Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas Data from database	Pass
	Vaillant ecoFIT sustain 615 VU 156/6-3 (H-GB)	
	Efficiency: 89.8% SEDBUK2009 Minimum: 88.0%	
Secondary heating system	None]
	None	
5 Cylinder insulation	NA. 1 12 1 1 4 24 13/11 / 1	
Hot water storage	Measured cylinder loss: 1.31 kWh/day Permitted by DBSCG 2.10	Pass
Primary pipework insulated	Yes	Pass
<u>6 Controls</u>		
Space heating controls	Time and temperature zone control	Pass
Hot water controls	Cylinderstat	Pass
	Independent timer for DHW	Pass
Boiler interlock	Yes	Pass
7 Low energy lights		
Percentage of fixed lights with low-energy fittings	100 %	
Minimum	75 %	Pass
8 Mechanical ventilation		
Not applicable		
Criterion 3 – Limiting the effects of heat gains in sur	nmer	
9 Summertime temperature		
Overheating risk (East Pennines)	Slight	Pass
Based on:		
Overshading	Average	
Windows facing North	8.54 m², No overhang	
Windows facing East	5.36 m ² , No overhang	
Windows facing South	0.97 m², No overhang	
Windows facing West	9.80 m², No overhang]]
Air change rate	2.50 ach	
Blinds/curtains	Light-coloured curtain or roller blind, closed 50% of daylight hours	
Criterion 4 – Building performance consistent with I		
Party Walls		
Туре	U-value	
	W/m²K	Pass
Air permeability and pressure testing		
3 Air permeability		
Air permeability at 50 pascals	7.00 (design value) m ³ /(h.m ²) @ 50 Pa	
Maximum	10.0 m³/(h.m²) @ 50 Pa	Pass

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



10 Key features

Party wall U-value Roof U-value

 0.00
 W/m²K

 0.11
 W/m²K



This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

