PREDICTED ENERGY ASSESSMENT




Plot 17, Land off Hawks Road, Dwelling type: House, Semi-Detached

Welton, Date of assessment: 19/07/2022 Lincoln, Produced by: Jake Eaton LN2 3BS Total floor area: 81.47 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

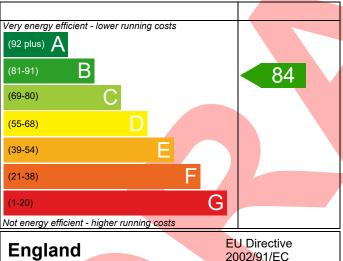

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

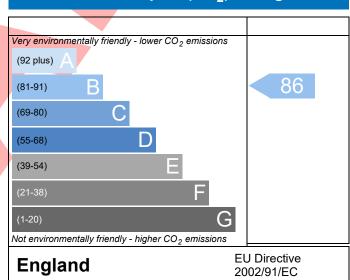

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



· · ·	LN2 3BS Plot 17		1		Issued on Date	19/07/202
Assessment Reference	001 Prop Type Ref Greenwich (Type B)					
	Plot 17, Land off Hawks	Road, Welton,	Lincoln, LN2 3I	BS		
SAP Rating		84 B	DER	18.03	TER	18.89
Environmental		86 B	% DER <ter< td=""><td>10.03</td><td>4.55</td><td>10.03</td></ter<>	10.03	4.55	10.03
CO₂ Emissions (t/year)		1.29	DFEE	46.99	TFEE	54.75
General Requirements C	ompliance	Pass	% DFEE <tfe< td=""><td></td><td>14.18</td><td></td></tfe<>		14.18	
Assessor Details Mr.	Jake Eaton, Jake Eaton,	Tel: 014002834	171, jake@aera	atech.co.uk	Assessor ID	P711-0001
Client						
UMARY FOR INPUT DAT	A FOR New Build (As D	esigned)				
riterion 1 – Achieving th	•					
a TER and DER						
Fuel for main heating		Mains g	as			
Fuel factor		1.00 (ma				
Target Carbon Dioxide	18.89			kgCO ₂ /m ²		
Dwelling Carbon Dioxide Emission Rate (DER)		18.03			kgCO ₂ /m ²	Pass
		-0.86 (-4	.6%)		kgCO ₂ /m ²	
b TFEE and DFEE						
Target Fabric Energy Efficiency (TFEE)		54.75			kWh/m²/yr	
Dwelling Fabric Energy Efficiency (DFEE)		46.99			kWh/m²/yr	
		-7.8 (-14	.2%)		kWh/m²/yr	Pass
riterion 2 – Limits on de	sign flexibility					
Limiting Fabric Standa	ards					
2 Fabric U-values						
Element	Ave	rage		Highest		
External wall	0.19	9 (max. 0.30)		0.19 (max. 0.7	(0)	Pass
Party wall	0.00) (max. 0.20)		-		Pass
Floor	0.14	0.14 (max. 0.25)		0.14 (max. 0.7	(0)	Pass
Roof	0.13	0.11 (max. 0.20)		0.12 (max. 0.35)		Pass
Openings	1.40	1.40 (max. 2.00)			0)	Pass
2a Thermal bridging						
Thermal bridging of	alculated from linear th	ermal transmit	tances for eacl	n junction		
3 Air permeability						
Air permeability at 50 pascals		7.00 (de	sign value)		m³/(h.m²) @ 50 Pa	
Maximum		10.0	•		m³/(h.m²) @ 50 Pa	
Limiting System Efficient					, -	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



4 Heating efficiency

Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas Data from database Vaillant ecoFIT sustain 835 VUW 356/6-3 (H-GB) Combi boiler			
	Efficiency: 89.3% SEDBUK2009			
	Minimum: 88.0%			
Secondary heating system	None			
5 Cylinder insulation				
Hot water storage	No cylinder			
<u>6 Controls</u>				
Space heating controls	Programmer, room thermostat and TRVs			
Hot water controls	No cylinder			
Boiler interlock	Yes			
7 Low energy lights				
Percentage of fixed lights with low-energy	100 %			
fittings				
Minimum	75 %	Pass		
8 Mechanical ventilation				
Not applicable				
Criterion 3 – Limiting the effects of heat gains in sum	mer			
9 Summertime temperature				
Overheating risk (East Pennines)	Slight			
Based on:				
Overshading	Average			
Windows facing North	6.91 m², No overhang			
Windows facing South	4.54 m ² , No overhang			
Windows facing West	1.45 m², No overhang			
Air change rate	2.50 ach			
Blinds/curtains	Light-coloured curtain or roller blind, closed 50% of daylight			
Criterion 4 – Building performance consistent with DI	hours			
Party Walls	EN AIIU DEEL TALE			
Type	U-value			
Filled Cavity with Edge Sealing	0.00 W/m²K	Pass		
Air permeability and pressure testing		1 455		
3 Air permeability				
Air permeability at 50 pascals	7.00 (design value) m ³ /(h.m ²) @ 50 Pa			
Maximum	10.0 m ³ /(h.m ²) @ 50 Pa	Pass		
10 Key features	/(/@ 301 d	. 233		
Party wall U-value	0.00 W/m²K			
Roof U-value	0.11 W/m²K			
Roof U-value	0.11 W/m²K			
Nooi o-value	W/III ⁻ K			

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19