PREDICTED ENERGY ASSESSMENT




Plot 18, Land off Hawks Road, Dwelling type: House, Semi-Detached

Welton, Date of assessment: 19/07/2022 Lincoln, Produced by: Jake Eaton LN2 3BS Total floor area: 81.47 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

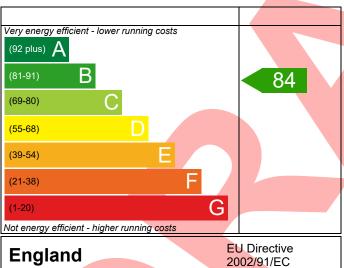

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

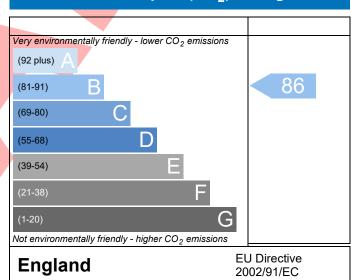

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Reference LN2 3BS Plot Assessment 001	18	Pro		Issued on Date Greenwich (Type B)	19/07/2022
Reference		PIC	pp Type Kei	reenwich (Type B)	
	off Hawks Road, Welton,	Lincoln, LN2 3BS			
SAP Rating	84 B	DER	18.03	TER	18.89
Environmental	86 B	% DER <ter< td=""><td></td><td>4.55</td><td></td></ter<>		4.55	
CO₂ Emissions (t/year)	1.29	DFEE	46.99	TFEE	54.75
General Requirements Compliance	Pass	% DFEE <tfee< td=""><td></td><td>14.18</td><td></td></tfee<>		14.18	
Assessor Details Mr. Jake Eaton, J	ake Eaton, Tel: 01400283	471, jake@aeratecl	h.co.uk	Assessor ID	P711-0001
Client					
UMARY FOR INPUT DATA FOR New E	Build (As Designed)				
riterion 1 – Achieving the TER and TF	EE rate				
a TER and DER					
Fuel for main heating	Mains	gas			
Fuel factor	1.00 (m	ains gas)			
Target Carbon Dioxide Emission Ra	te (TER) 18.89			kgCO₂/m²	
Dwelling Carbon Dioxide Emission	Rate (DER) 18.03			kgCO ₂ /m ²	Pass
	-0.86 (-	4.6%)		kgCO ₂ /m ²	
b TFEE and DFEE					
Target Fabric Energy Efficiency (TFE	EE) 54.75			kWh/m²/yr	
Dwelling Fabric Energy Efficiency (OFEE) 46.99		r	kWh/m²/yr	
	-7.8 (-1	1.2%)		kWh/m²/yr	Pass
riterion 2 – Limits on design flexibilit	:у				
Limiting Fabric Standards					
2 Fabric U-values					
Element	Average	His	ighest		
External wall	0.19 (max. 0.30)	0.:	19 (max. 0.70)		Pass
Party wall	0.00 (max. 0.20)	-			Pass
Floor	0.14 (max. 0.25)		14 (max. 0.70)		Pass
Roof	0.11 (max. 0.20)		0.12 (max. 0.35)		Pass
Openings	1.40 (max. 2.00)	1.4	40 (max. 3.30)		Pass
2a Thermal bridging					
Thermal bridging calculated fro	m linear thermal transmi	tances for each jun	nction		
3 Air permeability					
Air permeability at 50 pascals	7.00 (de	esign value)		m³/(h.m²) @ 50 Pa	
	10.0			m ³ /(h.m ²) @ 50 Pa	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



4 Heating efficiency

Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas Data from database Vaillant ecoFIT sustain 835 VUW 356/6-3 (H-GB)	Pass
	Combi boiler	
	Efficiency: 89.3% SEDBUK2009 Minimum: 88.0%	
Secondary heating system	None	
5 Cylinder insulation		
Hot water storage	No cylinder	
-	INO CYMINACI	
6 Controls		
Space heating controls	Programmer, room thermostat and TRVs	Pass
Hot water controls	No cylinder	
Boiler interlock	Yes	Pass
7 Low energy lights		
Percentage of fixed lights with low-energy fittings	100 %	
Minimum	75 %	Pass
8 Mechanical ventilation		
Not applicable		
Criterion 3 – Limiting the effects of heat gains in sur	mmer	
9 Summertime temperature		
Overheating risk (East Pennines)	Slight	Pass
Based on:		
Overshading	Average	
Windows facing North	6.91 m², No overhang	
Windows facing East	1.45 m ² , No overhang	
Windows facing South	4.54 m², No overhang	
Air change rate	2.50 ach	
Blinds/curtains		
Criteria de De ildica de forma de la cidade del cidade de la cidade del cidade de la cidade del cidade de la cidade del cidade de la cidade de la cidade de la cidade del cidade de la cidade del cidade de la cidade del cidade dela	hours	
Criterion 4 – Building performance consistent with	DER and Dree rate	
Party Walls	Unrelies	
Type	U-value	D
Filled Cavity with Edge Sealing	0.00 W/m²K	Pass
Air permeability and pressure testing		
3 Air permeability		
Air permeability at 50 pascals	7.00 (design value) m ³ /(h.m ²) @ 50 Pa	
Maximum	10.0 m ³ /(h.m ²) @ 50 Pa	Pass
10 Key features		
Party wall U-value	0.00 W/m ² K	
Roof U-value	0.11 W/m ² K	
Roof U-value	0.12 W/m²K	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19