PREDICTED ENERGY ASSESSMENT




Plot 22, Land off Hawks Road, Dwelling type: House, Detached

Welton,Date of assessment:19/07/2022Lincoln,Produced by:Jake EatonLN2 3BSTotal floor area:92.54 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

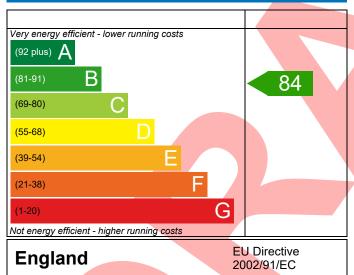

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

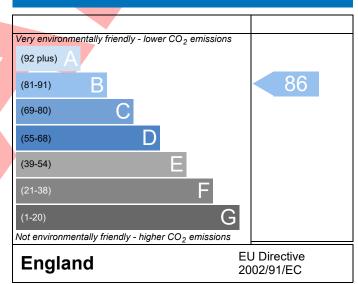

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Reference LN2 3BS Plot	22			Issued on Date	19/07/2022
Assessment 001		Pro	p Type Ref	Kingsbourne (Type D	1)
Reference	COLUMN TO THE PARTY OF THE PART				
Property Plot 22, Land	off Hawks Road, Welton, I	LINCOIN, LNZ 3BS			
SAP Rating	84 B	DER	17.90	TER	18.61
Environmental	86 B	% DER <ter< td=""><td></td><td>3.80</td><td>_</td></ter<>		3.80	_
CO ₂ Emissions (t/year)	1.47	DFEE	48.51	TFEE	57.49
General Requirements Compliance	Pass	% DFEE <tfee< td=""><td></td><td>15.62</td><td></td></tfee<>		15.62	
Assessor Details Mr. Jake Eaton, Ja	ake Eaton, Tel: 014002834	71, jake@aeratech	n.co.uk	Assessor ID	P711-0001
Client					
SUMARY FOR INPUT DATA FOR New B	Build (As Designed)				
Criterion 1 – Achieving the TER and TF	EE rate				
1a TER and DER					
Fuel for main heating	Mains ga	S			
Fuel factor	1.00 (ma	ins gas)			
Target Carbon Dioxide Emission Rat	te (TER) 18.61			kgCO ₂ /m ²	
Dwelling Carbon Dioxide Emission F	Rate (DER) 17.90			kgCO ₂ /m ²	Pass
	-0.71 (-3	8%)		kgCO ₂ /m ²	
1b TFEE and DFEE					
Target Fabric Energy Efficiency (TFE				kWh/m²/yr	
Dwelling Fabric Energy Efficiency (D				kWh/m²/yr	
	-9.0 (-15	7%)		kWh/m²/yr	Pass
Criterion 2 – Limits on design flexibilit	У				
Limiting Fabric Standards					
2 Fabric U-values					
Element	Average		ghest	.,	
External wall	0.19 (max. 0.30)		.9 (max. 0.70))	Pass
Party wall	0.00 (max. 0.20)	- 0.1	F /may 0.70		Pass
Floor	0.15 (max. 0.25)		0.15 (max. 0.70) 0.11 (max. 0.35)		Pass
Roof Openings	0.11 (max. 0.20) 1.40 (max. 2.00)		1.40 (max. 3.30)		Pass
2a Thermal bridging	1.40 (IIIax. 2.00)	1.4	ro (IIIax. 3.30	′1	F 435
Thermal bridging calculated from	m linear thermal transmitt	ances for each iun	ction		
3 Air permeability	in inteat thermal transfillt	ances for each juli	CHOII		
	7.00/4	rign value)		m ³ //h m ² \ @ FO D	2
Air permeability at 50 pascals Maximum		7.00 (design value)		m³/(h.m²) @ 50 Pa m³/(h.m²) @ 50 Pa	
IVI AVITTILITI	10.0			m ² /(n.m ²) (0 50 P	a Pass

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



4 Heating efficiency

Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas Data from database Vaillant ecoFIT sustain 835 VUW 356/6-3 (H-GB) Combi boiler Efficiency: 89.3% SEDBUK2009 Minimum: 88.0%	Pass
Secondary heating system	None	
5 Cylinder insulation		
Hot water storage	No cylinder	
<u>6 Controls</u>		
Space heating controls	Programmer, room thermostat and TRVs	Pass
Hot water controls	No cylinder	
Boiler interlock	Yes	Pass
7 Low energy lights		
Percentage of fixed lights with low-energy fittings	100 %	
Minimum	75 %	Pass
8 Mechanical ventilation		
Not applicable		
Criterion 3 – Limiting the effects of heat gains in sur	nmer	
9 Summertime temperature		
Overheating risk (East Pennines)	Slight	Pass
Based on:		_
Overshading	Average	
Windows facing North	2.06 m², Nó overhang	
Windows facing East Windows facing South	5.25 m ² , No overhang 7.70 m ² , No overhang	
Windows facing South Windows facing West	2.58 m², No overhang	
Air change rate	2.50 ach	
Blinds/curtains	Light-coloured curtain or roller blind, closed 50% of daylight	
	hours	
Criterion 4 – Building performance consistent with	DER and DFEE rate	
Party Walls		
Туре	U-value	
	W/m²K	Pass
Air permeability and pressure testing		
3 Air permeability		
Air permeability at 50 pascals	7.00 (design value) m ³ /(h.m ²) @ 50 Pa	
Maximum	10.0 m³/(h.m²) @ 50 Pa	Pass
10 Key features		
Party wall U-value	0.00 W/m²K	
Roof U-value	0.11 W/m²K	
Thermal bridging y-value	0.037 W/m²K	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19