#### PREDICTED ENERGY ASSESSMENT




Plot 27, Land off Hawks Road, Dwelling type: House, Semi-Detached

Welton, Date of assessment: 19/07/2022 Lincoln, Produced by: Jake Eaton LN2 3BS Total floor area: 81.47 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO<sub>2</sub>) emissions.

### **Energy Efficiency Rating**

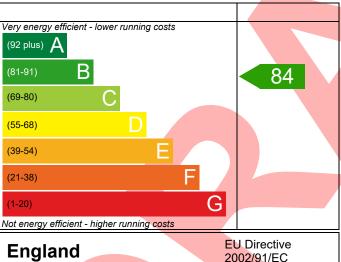

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

### **Environmental Impact (CO<sub>2</sub>) Rating**

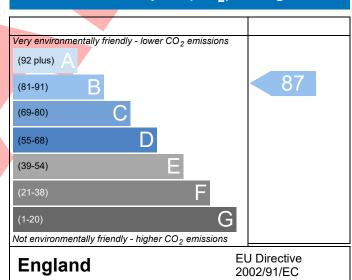

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO<sub>2</sub>) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



# **BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)**



Property Reference LN2 3BS Plot 27				Issued on Date	19/07/2022
Assessment 001		Pro	op Type Ref	Greenwich (Type B)	
Reference					
Property Plot 27, Land off Hawks	Road, Welton, L	Lincoln, LN2 3BS			
SAP Rating	84 B	DER	17.48	TER	18.48
Environmental	87 B	% DER <ter< td=""><td></td><td>5.42</td><td></td></ter<>		5.42	
CO <sub>2</sub> Emissions (t/year)	1.26	DFEE	44.86	TFEE	52.67
General Requirements Compliance	Pass	% DFEE <tfee< td=""><td></td><td>14.83</td><td></td></tfee<>		14.83	
Assessor Details Mr. Jake Eaton, Jake Eaton	, Tel: 014002834	71, jake@aeratec	h.co.uk	Assessor ID	P711-0001
Client					
SUMARY FOR INPUT DATA FOR New Build (As D	Designed)				
Criterion 1 – Achieving the TER and TFEE rate					
1a TER and DER					
Fuel for main heating	Mains ga	is			
Fuel factor	1.00 (ma	ins gas)			
Target Carbon Dioxide Emission Rate (TER)	18.48			kgCO₂/m²	
Dwelling Carbon Dioxide Emission Rate (DER)	17.48			kgCO₂/m²	Pass
	-1.00 (-5	.4%)		kgCO₂/m²	
1b TFEE and DFEE					
Target Fabric Energy Efficiency (TFEE)	52.67			kWh/m²/yr	
Dwelling Fabric Energy Efficiency (DFEE)	44.86	20(1)	7	kWh/m²/yr	
Critarian 2 Limite on design flavibility	-7.8 (-14	.8%)		kWh/m²/yr	Pass
Criterion 2 – Limits on design flexibility		_			
Limiting Fabric Standards					
2 Fabric U-values					
	erage		ghest 19 (max. 0.70	٦١	Pass
	.9 (max. 0.30) 00 (max. 0.20)	- -	19 (IIIax. 0.70	) 	Pass
	.4 (max. 0.25)		14 (max. 0.70	<b>)</b> )	Pass
	.1 (max. 0.20)		12 (max. 0.35	•	Pass
	0 (max. 2.00)		40 (max. 3.30	•	Pass
2a Thermal bridging	,		•		
Thermal bridging calculated from linear th	hermal transmitt	ances for each jur	nction		
3 Air permeability		-			
	7.00 (des	sign value)		m³/(h.m²) @ 50 Pa	1
Air permeability at 50 pascals					
Maximum  Maximum	10.0			m <sup>3</sup> /(h.m <sup>2</sup> ) @ 50 Pa	Pass
				m <sup>3</sup> /(h.m <sup>2</sup> ) @ 50 Pa	Pass

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

# **BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)**



Main heating system	Boiler system with radiators or underfloor - Mains gas Data from database Vaillant ecoFIT sustain 835 VUW 356/6-3 (H-GB) Combi boiler Efficiency: 89.3% SEDBUK2009 Minimum: 88.0%	Pass			
Secondary heating system	None				
5 Cylinder insulation					
Hot water storage	No cylinder				
<u>6 Controls</u>					
Space heating controls	Programmer, room thermostat and TRVs	Pass			
Hot water controls	No cylinder				
Boiler interlock	Yes				
7 Low energy lights					
Percentage of fixed lights with low-energy fittings	100 %				
Minimum	75 %	Pass			
8 Mechanical ventilation					
Not applicable					
Criterion 3 – Limiting the effects of heat gains in sur	mmer				
9 Summertime temperature					
Overheating risk (East Pennines)	Slight	Pass			
Based on:					
Overshading	Average				
Windows facing North	4.54 m², No overhang				
Windows facing East	1.45 m², No overhang				
Windows facing South	6.91 m², No overhang				
Air change rate	2.50 ach				
Blinds/curtains	Light-coloured curtain or roller blind, closed 50% of daylight hours				
Criterion 4 – Building performance consistent with					
Party Walls					
Туре	U-value				
Filled Cavity with Edge Sealing	0.00 W/m²K	Pass			
Air permeability and pressure testing					
3 Air permeability					
Air permeability at 50 pascals	7.00 (design value) m <sup>3</sup> /(h.m <sup>2</sup> ) @ 50 Pa				
Maximum	10.0 m³/(h.m²) @ 50 Pa	Pass			
10 Key features					
Party wall U-value	0.00 W/m²K				
Roof U-value	0.11 W/m²K				
Roof U-value	0.12 W/m²K				

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19