
### PREDICTED ENERGY ASSESSMENT



Plot 2, Land off Hawks Road, Welton, Lincoln, LN2 3BS Dwelling type: Date of assessment: Produced by: Total floor area: House, Detached 19/07/2022 Jake Eaton 133.94 m<sup>2</sup>


This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.

The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide  $(CO_2)$  emissions.

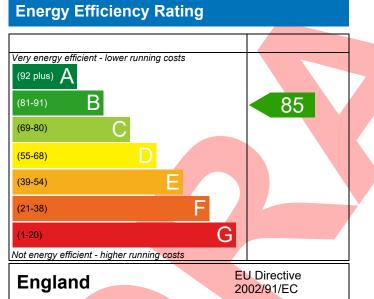

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

#### Environmental Impact (CO<sub>2</sub>) Rating

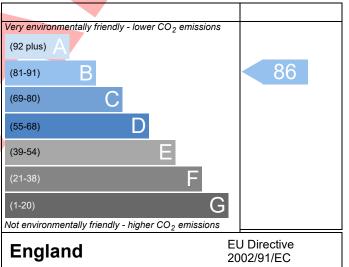

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide  $(CO_2)$  emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

## **BUILDING REGULATION COMPLIANCE** Calculation Type: New Build (As Designed)



Property Reference	LN2 3BS Plot 2 Issued on Date 19/07/202					
Assessment	001 Prop Type Ref Regent (Type H)					
Reference	Diet 2 Land off Llowiks Dead Welton Lincoln LN2 205					
Property Plot 2, Land off Hawks Road, Welton, Lincoln, LN2 3BS						
SAP Rating		85 B	DER	15.94	TER	16.37
Environmental		86 B	% DER <ter< td=""><td></td><td>2.64</td><td></td></ter<>		2.64	
CO <sub>2</sub> Emissions (t/year)		1.92	DFEE	48.03	TFEE	56.55
General Requirements Compliance		Pass	% DFEE <tfee< td=""><td></td><td>15.07</td><td></td></tfee<>		15.07	
	. Jake Eaton, Jake Eaton,	Tel: 014002834	71, jake@aerate	ch.co.uk	Assessor ID	P711-0001
Client						
SUMARY FOR INPUT DATA FOR New Build (As Designed)						
Criterion 1 – Achieving the TER and TFEE rate						
<u>1a TER and DER</u>						
Fuel for main heating	Mains gas					
Fuel factor	1.00 (ma	1.00 (mains gas)				
Target Carbon Dioxic	16.37			kgCO <sub>2</sub> /m <sup>2</sup>		
Dwelling Carbon Dio	15.94			kgCO <sub>2</sub> /m <sup>2</sup>	Pass	
	-0.43 (-2.6%) kgCO <sub>2</sub> /m <sup>2</sup>					
1b TFEE and DFEE						
Target Fabric Energy	56.55 kWh/m²/yr   48.03 kWh/m²/yr					
Dwelling Fabric Energy Efficiency (DFEE)			09/1		kWh/m²/yr kWh/m²/yr	Pass
-8.5 (-15.0%) kWh/m²/yr Pas Criterion 2 – Limits on design flexibility						Fass
Limiting Fabric Standards						
2 Fabric U-values						
Element	Ave	rage	н	lighest		
External wall		(max. 0.30)		.19 (max. 0.70	))	Pass
Party wall		(max. 0.20)			,	Pass
Floor	0.14	(max. 0.25)	0	0.14 (max. 0.70)		Pass
Roof	0.11	(max. 0.20)	0.11 (max. 0.35)		5)	Pass
Openings	Openings 1.40 (m		1.40 (max. 3.30)		Pass	
2a Thermal bridging						
Thermal bridging	calculated from linear the	ermal transmitt	ances for each ju	inction		
<u>3 Air permeability</u>						
Air permeability a	7.00 (des	sign value)		m³/(h.m²) @ 50 Pa	a	
Maximum	10.0		m³/(h.m²) @ 50 Pa	Pass		
Limiting System Effic						
4 Heating efficiency						

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

#### **BUILDING REGULATION COMPLIANCE** Aeratech Ltd Calculation Type: New Build (As Designed) Main heating system Boiler system with radiators or underfloor - Mains gas Pass Data from database Vaillant ecoFIT sustain 615 VU 156/6-3 (H-GB) Efficiency: 89.8% SEDBUK2009 Minimum: 88.0% None Secondary heating system **5** Cylinder insulation Measured cylinder loss: 1.31 kWh/day Hot water storage Pass Permitted by DBSCG 2.10 Primary pipework insulated Yes Pass **6** Controls Space heating controls Time and temperature zone control Pass Hot water controls Cylinderstat Pass Independent timer for DHW Pass **Boiler** interlock Yes Pass 7 Low energy lights Percentage of fixed lights with low-energy 100 % fittings Minimum 75 % Pass **8** Mechanical ventilation Not applicable Criterion 3 – Limiting the effects of heat gains in summer 9 Summertime temperature Overheating risk (East Pennines) Slight Pass Based on: Average Overshading Windows facing East 12.94 m<sup>2</sup>, No overhang 9.04 m<sup>2</sup>, No overhang Windows facing West Air change rate 2.50 ach Blinds/curtains Light-coloured curtain or roller blind, closed 50% of daylight hours Criterion 4 – Building performance consistent with DER and DFEE rate **Party Walls U-value** Type W/m<sup>2</sup>K Pass Air permeability and pressure testing **3 Air permeability** Air permeability at 50 pascals 7.00 (design value) m<sup>3</sup>/(h.m<sup>2</sup>) @ 50 Pa Pass m<sup>3</sup>/(h.m<sup>2</sup>) @ 50 Pa Maximum 10.0

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



# **BUILDING REGULATION COMPLIANCE** Acratech Ltd Calculation Type: New Build (As Designed) **10 Key features** Party wall U-value 0.00 W/m²K Roof U-value 0.11 W/m<sup>2</sup>K Thermal bridging y-value 0.032 W/m<sup>2</sup>K

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

