PREDICTED ENERGY ASSESSMENT




Plot 30, Land off Hawks Road, Dwelling type: House, Semi-Detached

Welton, Date of assessment: 19/07/2022
Lincoln, Produced by: Jake Eaton
LN2 3BS
Total floor area: 81.47 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

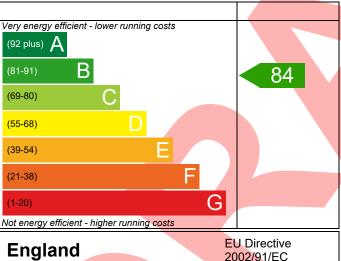

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

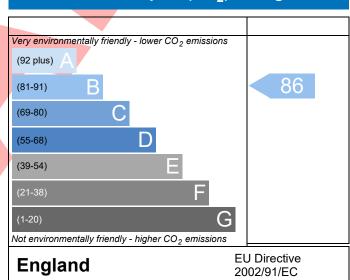

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Reference LN2 3BS Plot 3	30			Issued on Date	19/07/2022
Assessment 001 Reference			Prop Type Ref	Greenwich (Type B)	
	off Hawks Road, Wel	ton, Lincoln, LN2 3	BS		
SAP Rating	84 E	DER	18.03	TER	18.89
Environmental	86 E	% DER <ter< td=""><td></td><td>4.55</td><td></td></ter<>		4.55	
CO₂ Emissions (t/year)	1.29	DFEE	46.99	TFEE	54.75
General Requirements Compliance	Pass	% DFEE <tfi< td=""><td>EE</td><td>14.18</td><td></td></tfi<>	EE	14.18	
Assessor Details Mr. Jake Eaton, Ja	ke Eaton, Tel: 01400		atech.co.uk	Assessor ID	P711-0001
Client					
SUMARY FOR INPUT DATA FOR New B	uild (As Designed)				
Criterion 1 – Achieving the TER and TF	EE rate				
La TER and DER					
Fuel for main heating	Ma	ins gas			
Fuel factor		(mains gas)			
Target Carbon Dioxide Emission Rat	e (TER) 18.	39	7	kgCO₂/m²	
Dwelling Carbon Dioxide Emission Rate (DER)		03		kgCO ₂ /m ²	Pass
	-0.8	86 (-4.6%)		kgCO ₂ /m ²	
Lb TFEE and DFEE					
Target Fabric Energy Efficiency (TFEE)		75		kWh/m²/yr	
Dwelling Fabric Energy Efficiency (D				kWh/m²/yr	
		3 (-14.2%)		kWh/m²/yr	Pass
Criterion 2 – Limits on design flexibility	/				
Limiting Fabric Standards					
2 Fabric U-values					
Element	Average		Highest		
External wall	0.19 (max. 0.3		0.19 (max. 0.7	0)	Pass
Party wall	0.00 (max. 0.2		0.14/2004.0.7	0)	Pass
Floor	0.14 (max. 0.2		0.14 (max. 0.7	•	Pass
Roof Openings	0.11 (max. 0.20) 1.40 (max. 2.00)		0.12 (max. 0.35) 1.40 (max. 3.30)		Pass
2a Thermal bridging	1.40 (IIIax. 2.0	0)	1.40 (IIIax. 3.3	0)	F d 3 3
Thermal bridging calculated from	n linear thermal tran	smittances for eac	h iunction		
3 Air permeability	ii iii car thermar trai	Similarices for eac	ii janedoli		
Air permeability at 50 pascals	7.0	O (design value)		m³/(h.m²) @ 50 Pa	2
Maximum	10.0			m³/(h.m²) @ 50 Pa	
IVIAXIIIIUIII	[10.0	,		111 / (11.111) @ 30 Pc	rass

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



4 Heating efficiency

Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas Data from database Vaillant ecoFIT sustain 835 VUW 356/6-3 (H-GB)			
	Combi boiler			
	Efficiency: 89.3% SEDBUK2009 Minimum: 88.0%			
Secondary heating system	None			
5 Cylinder insulation				
Hot water storage	No cylinder			
-	INO CYMINACI			
6 Controls				
Space heating controls	Programmer, room thermostat and TRVs	Pass		
Hot water controls	No cylinder			
Boiler interlock	Yes	Pass		
7 Low energy lights				
Percentage of fixed lights with low-energy fittings	100 %			
Minimum	75 %	Pass		
8 Mechanical ventilation				
Not applicable				
Criterion 3 – Limiting the effects of heat gains in sur	mmer			
9 Summertime temperature				
Overheating risk (East Pennines)	Slight	Pass		
Based on:				
Overshading	Average			
Windows facing North	6.91 m², No overhang			
Windows facing East	1.45 m ² , No overhang			
Windows facing South	4.54 m², No overhang			
Air change rate	2.50 ach			
Blinds/curtains	Light-coloured curtain or roller blind, closed 50% of daylight			
Criteria de Prildia de Companya de La Criteria	hours			
Criterion 4 – Building performance consistent with	DER and Dree rate			
Party Walls	Unrelies			
Type	U-value	D		
Filled Cavity with Edge Sealing	0.00 W/m²K	Pass		
Air permeability and pressure testing				
3 Air permeability				
Air permeability at 50 pascals	7.00 (design value) m ³ /(h.m ²) @ 50 Pa			
Maximum	10.0 m ³ /(h.m ²) @ 50 Pa	Pass		
10 Key features				
Party wall U-value	0.00 W/m ² K			
Roof U-value	0.11 W/m ² K			
Roof U-value	0.12 W/m²K			

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19