PREDICTED ENERGY ASSESSMENT




Plot 32, Land off Hawks Road, Welton, Lincoln, LN2 3BS Dwelling type: Date of assessment: Produced by: Total floor area:

House, Semi-Detached 19/07/2022 Jake Eaton 81.47 m²


This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.

The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO_2) emissions.

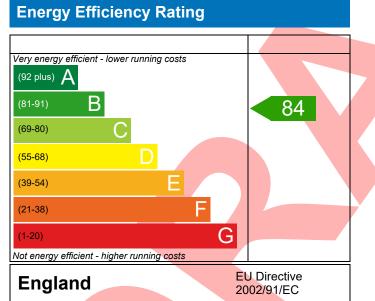

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

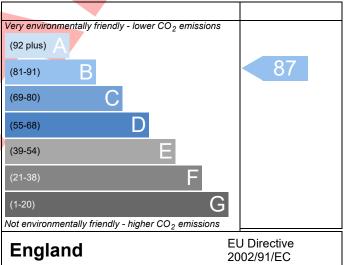

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO_2) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Reference	LN2 3BS Plot 32					Issued on Date	19/07/2022
Assessment	001			Pr	op Type Ref	Greenwich (Type B)	
Reference		laudi e	a al 147-12	incolo 1 NO 000			
Property	Plot 32, Land off I	Hawks Ro	bad, welton, L				
SAP Rating			84 B	DER	17.48	TER	18.48
Environmental			87 B	% DER <ter< th=""><th></th><th>5.42</th><th></th></ter<>		5.42	
CO ₂ Emissions (t/yea			1.26	DFEE	44.86	TFEE	52.67
General Requirement	ts Compliance		Pass	% DFEE <tfee< th=""><th></th><th>14.83</th><th></th></tfee<>		14.83	
Assessor Details	Mr. Jake Eaton, Jake	Eaton, Te	el: 014002834	71, jake@aerate	ch.co.uk	Assessor ID	P711-0001
Client							
SUMARY FOR INPUT	OATA FOR New Build	l (As Des	igned)				
Criterion 1 – Achievin	g the TER and TFEE r	ate					
1a TER and DER							
Fuel for main heati	ing		Mains ga	IS			
Fuel factor			1.00 (ma	ins gas)			
Target Carbon Dio	kide Emission Rate (T	ER)	18.48			kgCO ₂ /m ²	
Dwelling Carbon D	Dwelling Carbon Dioxide Emission Rate (DER)		17.48			kgCO ₂ /m ²	Pass
			-1.00 (-5.	.4%)		kgCO ₂ /m ²	
<u>1b TFEE and DFEE</u>							
-	gy Efficiency (TFEE)		52.67			kWh/m²/yr	
Dwelling Fabric En	ergy Efficiency (DFEE)	44.86	20(1)		kWh/m²/yr	
	destan flandstitur		-7.8 (-14,	.8%)		kWh/m²/yr	Pass
Criterion 2 – Limits on							
Limiting Fabric Sta	ndards						
2 Fabric U-values							
Element		Avera	-		lighest		Data
External wa Party wall	"		max. 0.30) max. 0.20)	0	.19 (max. 0.7	0)	Pass Pass
Floor			max. 0.20) max. 0.25)		.14 (max. 0.7	0)	Pass
Roof			max. 0.20)		.12 (max. 0.3		Pass
Openings			max. 2.00)		.40 (max. 3.3		Pass
2a Thermal bridgir	ng					- /	
	ng calculated from lir	near the	mal transmitt	ances for each iu	nction		
3 Air permeability							
Air permeability			7.00 (des	sign value)		m³/(h.m²) @ 50 Pa	
Maximum	,		10.0	0,		m ³ /(h.m ²) @ 50 Pa	Pass
Limiting System Ef	ficienci <u>es</u>						
4 Heating efficience							

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas Data from database Vaillant ecoFIT sustain 835 VUW 356/6-3 (H-GB)			
	Combi boiler			
	Efficiency: 89.3% SEDBUK2009			
	Minimum: 88.0%			
Secondary heating system	None			
5 Cylinder insulation				
Hot water storage	No cylinder			
<u>6 Controls</u>				
Space heating controls	Programmer, room thermostat and TRVs	Pass		
Hot water controls	No cylinder			
Boiler interlock	Yes	Pass		
7 Low energy lights				
Percentage of fixed lights with low-energy fittings	100 %			
Minimum	75 %	Pass		
8 Mechanical ventilation				
Not applicable				
riterion 3 – Limiting the effects of heat gains in su	mmer			
Summertime temperature				
Overheating risk (East Pennines)	Slight	Pass		
ased on:				
Overshading	Average			
Windows facing North	4.54 m ² , No overhang			
Windows facing South	6.91 m ² , No overhang			
	1.45 m ² , No overhang			
Windows facing West				
Windows facing West Air change rate	2.50 ach			
_		t		
Air change rate Blinds/curtains	2.50 ach Light-coloured curtain or roller blind, closed 50% of dayligh hours	t		
Air change rate Blinds/curtains riterion 4 – Building performance consistent with	2.50 ach Light-coloured curtain or roller blind, closed 50% of dayligh hours	t		
Air change rate Blinds/curtains riterion 4 – Building performance consistent with Party Walls	2.50 ach Light-coloured curtain or roller blind, closed 50% of dayligh hours DER and DFEE rate	t		
Air change rate Blinds/curtains riterion 4 – Building performance consistent with Party Walls Type	2.50 ach Light-coloured curtain or roller blind, closed 50% of dayligh hours DER and DFEE rate U-value			
Air change rate Blinds/curtains riterion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing	2.50 ach Light-coloured curtain or roller blind, closed 50% of dayligh hours DER and DFEE rate	t Pass		
Air change rate Blinds/curtains riterion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing	2.50 ach Light-coloured curtain or roller blind, closed 50% of dayligh hours DER and DFEE rate U-value			
Air change rate Blinds/curtains riterion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability	2.50 ach Light-coloured curtain or roller blind, closed 50% of dayligh hours DER and DFEE rate U-value 0.00 W/m ² K	Pass		
Air change rate Blinds/curtains riterion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing	2.50 ach Light-coloured curtain or roller blind, closed 50% of dayligh hours DER and DFEE rate U-value 0.00 W/m²K 7.00 (design value) m³/(h.m²) @ 50 Pa	Pass		
Air change rate Blinds/curtains riterion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability Air permeability at 50 pascals Maximum	2.50 ach Light-coloured curtain or roller blind, closed 50% of dayligh hours DER and DFEE rate U-value 0.00 W/m ² K	Pass		
Air change rate Blinds/curtains riterion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability Air permeability at 50 pascals	2.50 ach Light-coloured curtain or roller blind, closed 50% of dayligh hours DER and DFEE rate U-value 0.00 W/m²K 7.00 (design value) m³/(h.m²) @ 50 Pa	Pass		
Air change rate Blinds/curtains riterion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability Air permeability at 50 pascals Maximum	2.50 ach Light-coloured curtain or roller blind, closed 50% of dayligh hours DER and DFEE rate U-value 0.00 W/m²K 7.00 (design value) m³/(h.m²) @ 50 Pa	Pass		
Air change rate Blinds/curtains riterion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability Air permeability Air permeability at 50 pascals Maximum D Key features	2.50 ach Light-coloured curtain or roller blind, closed 50% of daylight hours DER and DFEE rate U-value 0.00 W/m²K 7.00 (design value) m³/(h.m²) @ 50 Pa 10.0 m³/(h.m²) @ 50 Pa	Pass		

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

