#### PREDICTED ENERGY ASSESSMENT




Plot 35, Land off Hawks Road, Dwelling type: House, Detached

Welton,Date of assessment:19/07/2022Lincoln,Produced by:Jake EatonLN2 3BSTotal floor area:92.54 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO<sub>2</sub>) emissions.

### **Energy Efficiency Rating**

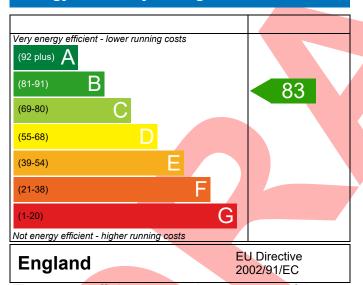

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

### Environmental Impact (CO<sub>2</sub>) Rating

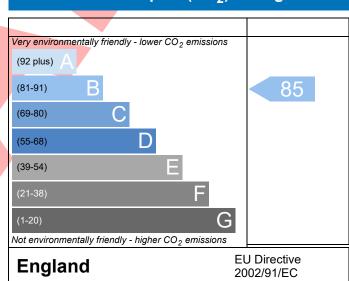

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO<sub>2</sub>) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



# **BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)**



Property Reference LN2 3BS Plot	35			Issued on Date	19/07/2022
Assessment 001		Pro	op Type Ref	Kingsbourne (Type D	)1)
Reference Property Plot 35, Land	off Hawks Road, Weltor	n Lincoln LN2 3BS			
			10.64	TED	40.05
SAP Rating	83 B	DER	18.64	TER	18.85
Environmental	85 B	% DER <ter< td=""><td>51.53</td><td>1.12 TFEE</td><td>58.78</td></ter<>	51.53	1.12 TFEE	58.78
CO <sub>2</sub> Emissions (t/year) General Requirements Compliance	1.54 Pass	DFEE % DFEE <tfee< td=""><td>51.53</td><td>12.34</td><td>36.76</td></tfee<>	51.53	12.34	36.76
			h an illi		D711 0001
	ake Eaton, Tel: 0140028	34/1, jake@aeratec	n.co.uk	Assessor ID	P711-0001
Client	- 11./ 1				
SUMARY FOR INPUT DATA FOR New					
Criterion 1 – Achieving the TER and T	FEE rate				
La TER and DER				<b>,</b>	
Fuel for main heating	Mains				
Fuel factor		mains gas)			
Target Carbon Dioxide Emission Ra	· · ·	18.85		kgCO <sub>2</sub> /m <sup>2</sup>	
Dwelling Carbon Dioxide Emission		1.100		kgCO <sub>2</sub> /m <sup>2</sup>	Pass
Lb TFEE and DFEE	-0.21 (	-1.1%)		kgCO₂/m²	
Target Fabric Energy Efficiency (TF	EE) 58.78			kWh/m²/yr	
Dwelling Fabric Energy Efficiency (I	· ( )			kWh/m²/yr	
Dwelling rabile Ellergy Elliciency (I	-7.3 (-:	12.4%)	7	kWh/m²/yr	Pass
Criterion 2 – Limits on design flexibili		12.17,0)		Kunyin yyi	1 033
Limiting Fabric Standards					
2 Fabric U-values					
Element	Average	Hi	ighest		
External wall	0.19 (max. 0.30)		19 (max. 0.7)	0)	Pass
Party wall	0.00 (max. 0.20)	-	•		Pass
Floor	0.15 (max. 0.25)	0.	15 (max. 0.7	0)	Pass
Roof	0.11 (max. 0.20)	0.	0.11 (max. 0.35)		Pass
Openings	1.40 (max. 2.00)	1.	1.40 (max. 3.30)		Pass
2a Thermal bridging					
Thermal bridging calculated fro	om linear thermal transm	nittances for each jur	nction		
3 Air permeability					
Air permeability at 50 pascals	7.00 (0	7.00 (design value)		m³/(h.m²) @ 50 Pa	
Maximum	10.0	•		m³/(h.m²) @ 50 P	
Limiting System Efficiencies				• •	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



**4 Heating efficiency** 

Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

## **BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)**



Main heating system	Boiler system with radiators or underfloor - Mains gas	Pass	
	Data from database		
	Vaillant ecoFIT sustain 835 VUW 356/6-3 (H-GB) Combi boiler		
	Efficiency: 89.3% SEDBUK2009		
	Minimum: 88.0%		
Secondary heating system	None		
5 Cylinder insulation			
Hot water storage	No cylinder		
<u>6 Controls</u>			
Space heating controls	Programmer, room thermostat and TRVs	Pass	
Hot water controls	No cylinder		
Boiler interlock	Yes	Pass	
7 Low energy lights	. 55		
Percentage of fixed lights with low-energy	100 %		
fittings	70		
Minimum	75 %	Pass	
8 Mechanical ventilation			
Not applicable			
Criterion 3 – Limiting the effects of heat gains in sur	nmer		
9 Summertime temperature			
Overheating risk (East Pennines)	Slight	Pass	
Based on:			
Overshading	Average		
Windows facing North	2.58 m², No overhang		
Windows facing East	7.70 m², No overhang		
Windows facing South	5.25 m <sup>2</sup> , No overhang		
Windows facing West	2.06 m², No overhang	_	
Air change rate	2.50 ach		
Blinds/curtains	Light-coloured curtain or roller blind, closed 50% of daylight		
	hours		
Criterion 4 – Building performance consistent with	DER and DFEE rate		
Party Walls			
Туре	U-value		
	W/m²K	Pass	
Air permeability and pressure testing			
3 Air permeability			
Air permeability at 50 pascals	7.00 (design value) m <sup>3</sup> /(h.m <sup>2</sup> ) @ 50 Pa		
Maximum	10.0 m³/(h.m²) @ 50 Pa	Pass	
10 Key features			
Party wall U-value	0.00 W/m²K		
Roof U-value	0.11 W/m²K		

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19