PREDICTED ENERGY ASSESSMENT




Plot 37, Land off Hawks Road, Welton, Lincoln, LN2 3BS Dwelling type: Date of assessment: Produced by: Total floor area:

House, Semi-Detached 19/07/2022 Jake Eaton 64.6 m²


This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.

The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO_2) emissions.

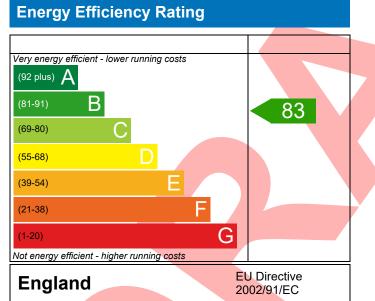

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

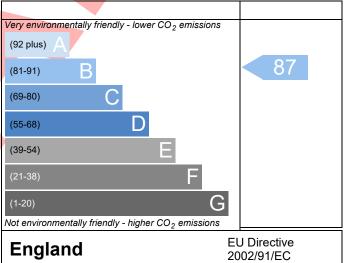

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO_2) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Reference	LN2 3BS Plot 37					Issued on Date	19/07/2022
Assessment	001				Prop Type Ref	Eltham (Type A)	
Reference	Dist 27 Jan distfill]
Property	Plot 37, Land off Ha	awks Ro	ad, weiton, L	LINCOIN, LINZ 3BS			
SAP Rating			83 B	DER	18.78	TER	19.69
Environmental			87 B	% DER <ter< th=""><th></th><th>4.60</th><th></th></ter<>		4.60	
CO ₂ Emissions (t/yea			1.08	DFEE	46.25	TFEE	53.77
General Requirement	ts Compliance		Pass	% DFEE <tfee< th=""><th></th><th>14.00</th><th></th></tfee<>		14.00	
	VIr. Jake Eaton, Jake Ea	aton, Te	l: 014002834	71, jake@aerat	ech.co.uk	Assessor ID	P711-0001
Client							
SUMARY FOR INPUT	DATA FOR New Build (As Desi	gned)				
Criterion 1 – Achieving	g the TER and TFEE ra	te					
<u>1a TER and DER</u>							
Fuel for main heati	ing		Mains ga	IS			
Fuel factor			1.00 (ma	ins gas)			
Target Carbon Dio	kide Emission Rate (TE	R)	19.69			kgCO ₂ /m ²	
Dwelling Carbon D	ioxide Emission Rate (DER)	18.78			kgCO ₂ /m ²	Pass
			-0.91 (-4.	.6%)		kgCO ₂ /m ²	
<u>1b TFEE and DFEE</u>							
Target Fabric Energ			53.77			kWh/m²/yr	
Dwelling Fabric En	ergy Efficiency (DFEE)		46.25	4.0(1)		kWh/m²/yr	
Cuitorion 2 Limite on	design flowibility		-7.6 (-14	.1%)		kWh/m²/yr	Pass
Criterion 2 – Limits on							
Limiting Fabric Sta	nuarus						
2 Fabric U-values					111-1		
Element		Avera	-		Highest	0)	Daga
External wa	"		max. 0.30) max. 0.20)		0.19 (max. 0.7	0)	Pass
Party wall Floor			max. 0.20) max. 0.25)		- 0.14 (max. 0.7	0)	Pass Pass
Roof		-	max. 0.23)		0.14 (max. 0.7 0.11 (max. 0.3	,	Pass
Openings			max. 2.00)		1.40 (max. 3.3		Pass
2a Thermal bridgir	ισ	1.40 (1	1107. 2.007		1.40 (max. 5.5	0)	1 435
	ng calculated from line	ar ther	mal transmitt	ances for each i	unction		
3 Air permeability		ur then			anetion		
Air permeability	v at 50 pascals		7 00 (dec	sign value)		m³/(h.m²) @ 50 P	a
Maximum	, at so pascals		10.0			m ³ /(h.m ²) @ 50 P	
Limiting System Ef	ficiencies		10.0				
4 Heating efficience							
- ricating enitiellt	T.						

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains Data from database	gas Pass
	Vaillant ecoFIT sustain 835 VUW 356/6-3 (H-GB)	
	Combi boiler	
	Efficiency: 89.3% SEDBUK2009	
	Minimum: 88.0%	
Secondary heating system	None	
5 Cylinder insulation		
Hot water storage	No cylinder	
<u>6 Controls</u>		
Space heating controls	Programmer, room thermostat and TRVs	Pass
Hot water controls	No cylinder	
Boiler interlock	Yes	Pass
7 Low energy lights		
Percentage of fixed lights with low-energy	/ 100 %	
fittings		
Minimum	75 %	Pass
8 Mechanical ventilation		
Not applicable		
	summer	
riterion 3 – Limiting the effects of heat gains in	summer	
riterion 3 – Limiting the effects of heat gains in	summer	Pass
riterion 3 – Limiting the effects of heat gains in Summertime temperature Overheating risk (East Pennines)		Pass
riterion 3 – Limiting the effects of heat gains in Summertime temperature Overheating risk (East Pennines)		Pass
riterion 3 – Limiting the effects of heat gains in <u>Summertime temperature</u> Overheating risk (East Pennines) ased on: Overshading Windows facing East	Slight Average 3.01 m ² , No overhang	Pass
riterion 3 – Limiting the effects of heat gains in <u>Summertime temperature</u> Overheating risk (East Pennines) ased on: Overshading Windows facing East Windows facing South	Slight Average 3.01 m², No overhang 1.91 m², No overhang	Pass
riterion 3 – Limiting the effects of heat gains in <u>Summertime temperature</u> Overheating risk (East Pennines) ased on: Overshading Windows facing East Windows facing South Windows facing West	Slight Average 3.01 m ² , No overhang 1.91 m ² , No overhang 6.28 m ² , No overhang	Pass
riterion 3 – Limiting the effects of heat gains in <u>Summertime temperature</u> Overheating risk (East Pennines) ased on: Overshading Windows facing East Windows facing South Windows facing West Air change rate	Slight Average 3.01 m², No overhang 1.91 m², No overhang 6.28 m², No overhang 2.50 ach	
riterion 3 – Limiting the effects of heat gains in <u>Summertime temperature</u> Overheating risk (East Pennines) ased on: Overshading Windows facing East Windows facing South Windows facing West	Slight Average 3.01 m², No overhang 1.91 m², No overhang 6.28 m², No overhang 2.50 ach Light-coloured curtain or roller blind, closed 50% or	
riterion 3 – Limiting the effects of heat gains in <u>Summertime temperature</u> Overheating risk (East Pennines) ased on: Overshading Windows facing East Windows facing South Windows facing West Air change rate Blinds/curtains	Slight Average 3.01 m², No overhang 1.91 m², No overhang 6.28 m², No overhang 2.50 ach Light-coloured curtain or roller blind, closed 50% o hours	
riterion 3 – Limiting the effects of heat gains in <u>Summertime temperature</u> Overheating risk (East Pennines) ased on: Overshading Windows facing East Windows facing South Windows facing West Air change rate Blinds/curtains riterion 4 – Building performance consistent with	Slight Average 3.01 m², No overhang 1.91 m², No overhang 6.28 m², No overhang 2.50 ach Light-coloured curtain or roller blind, closed 50% o hours	
riterion 3 – Limiting the effects of heat gains in Summertime temperature Overheating risk (East Pennines) ased on: Overshading Windows facing East Windows facing South Windows facing West Air change rate Blinds/curtains riterion 4 – Building performance consistent wi Party Walls	Slight Average 3.01 m², No overhang 1.91 m², No overhang 6.28 m², No overhang 2.50 ach Light-coloured curtain or roller blind, closed 50% o hours ith DER and DFEE rate	
riterion 3 – Limiting the effects of heat gains in <u>Summertime temperature</u> Overheating risk (East Pennines) ased on: Overshading Windows facing East Windows facing South Windows facing West Air change rate Blinds/curtains riterion 4 – Building performance consistent with Party Walls Type	Slight Average 3.01 m ² , No overhang 1.91 m ² , No overhang 6.28 m ² , No overhang 2.50 ach Light-coloured curtain or roller blind, closed 50% o hours ith DER and DFEE rate U-value	f daylight
riterion 3 – Limiting the effects of heat gains in <u>Summertime temperature</u> Overheating risk (East Pennines) ased on: Overshading Windows facing East Windows facing South Windows facing West Air change rate Blinds/curtains riterion 4 – Building performance consistent wi Party Walls Type Filled Cavity with Edge Sealing	Slight Average 3.01 m², No overhang 1.91 m², No overhang 6.28 m², No overhang 2.50 ach Light-coloured curtain or roller blind, closed 50% o hours ith DER and DFEE rate	f daylight
riterion 3 – Limiting the effects of heat gains in Summertime temperature Overheating risk (East Pennines) ased on: Overshading Windows facing East Windows facing South Windows facing West Air change rate Blinds/curtains riterion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing	Slight Average 3.01 m ² , No overhang 1.91 m ² , No overhang 6.28 m ² , No overhang 2.50 ach Light-coloured curtain or roller blind, closed 50% o hours ith DER and DFEE rate U-value	f daylight
riterion 3 – Limiting the effects of heat gains in <u>Summertime temperature</u> Overheating risk (East Pennines) ased on: Overshading Windows facing East Windows facing South Windows facing West Air change rate Blinds/curtains riterion 4 – Building performance consistent wi Party Walls Type Filled Cavity with Edge Sealing	Slight Average 3.01 m², No overhang 1.91 m², No overhang 6.28 m², No overhang 2.50 ach Light-coloured curtain or roller blind, closed 50% o hours ith DER and DFEE rate U-value 0.00	f daylight
riterion 3 – Limiting the effects of heat gains in Summertime temperature Overheating risk (East Pennines) ased on: Overshading Windows facing East Windows facing South Windows facing West Air change rate Blinds/curtains riterion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing	Slight Average 3.01 m ² , No overhang 1.91 m ² , No overhang 6.28 m ² , No overhang 2.50 ach Light-coloured curtain or roller blind, closed 50% o hours ith DER and DFEE rate U-value	f daylight n ² K Pass
riterion 3 – Limiting the effects of heat gains in Summertime temperature Overheating risk (East Pennines) ased on: Overshading Windows facing East Windows facing South Windows facing West Air change rate Blinds/curtains riterion 4 – Building performance consistent wi Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability	Slight Average 3.01 m², No overhang 1.91 m², No overhang 6.28 m², No overhang 2.50 ach Light-coloured curtain or roller blind, closed 50% o hours ith DER and DFEE rate U-value 0.00	f daylight n²K Pass @ 50 Pa
riterion 3 – Limiting the effects of heat gains in Summertime temperature Overheating risk (East Pennines) ased on: Overshading Windows facing East Windows facing South Windows facing West Air change rate Blinds/curtains riterion 4 – Building performance consistent wi Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability Air permeability at 50 pascals Maximum	Slight Average 3.01 m², No overhang 1.91 m², No overhang 6.28 m², No overhang 2.50 ach Light-coloured curtain or roller blind, closed 50% o hours ith DER and DFEE rate U-value 0.00 W/r 7.00 (design value) m³/(h.m²)	f daylight n²K Pass @ 50 Pa
riterion 3 – Limiting the effects of heat gains in Summertime temperature Overheating risk (East Pennines) ased on: Overshading Windows facing East Windows facing South Windows facing West Air change rate Blinds/curtains riterion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability Air permeability at 50 pascals	Slight Average 3.01 m², No overhang 1.91 m², No overhang 6.28 m², No overhang 2.50 ach Light-coloured curtain or roller blind, closed 50% o hours ith DER and DFEE rate U-value 0.00 W/r 7.00 (design value) m³/(h.m²)	n ² K Pass @ 50 Pa @ 50 Pa @ 50 Pa Pass

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19