#### PREDICTED ENERGY ASSESSMENT




Plot 12, Land off Hawks Road, Dwelling type: House, Semi-Detached

Welton, Date of assessment: 19/07/2022 Lincoln, Produced by: Jake Eaton LN2 3BS Total floor area: 81.47 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO<sub>2</sub>) emissions.

### **Energy Efficiency Rating**

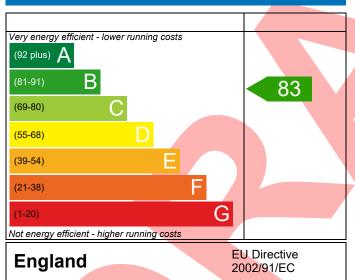

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

### Environmental Impact (CO<sub>2</sub>) Rating

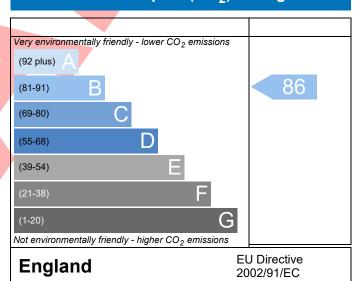

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO<sub>2</sub>) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



# **BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)**



	N2 3BS Plot 12		11		Issued on Date	19/07/202
Assessment Reference	001 Prop Type Ref Greenwich (Type B)					
	Plot 12, Land off Hawks	Road, Welton,	Lincoln, LN2 3E	3S		
SAP Rating		83 B	DER	18.44	TER	18.96
Environmental		86 B	% DER <ter< td=""><td></td><td>2.75</td><td></td></ter<>		2.75	
CO <sub>2</sub> Emissions (t/year)		1.33	DFEE	49.11	TFEE	55.45
General Requirements C	ompliance	Pass	% DFEE <tfe< td=""><td>E</td><td>11.42</td><td></td></tfe<>	E	11.42	
Assessor Details Mr.	Jake Eaton, Jake Eaton,	Tel: 014002834	171, jake@aera	itech.co.uk	Assessor ID	P711-0001
Client						
SUMARY FOR INPUT DATA	A FOR New Build (As D	esigned)				
riterion 1 – Achieving th	e TER and TFEE rate					
a TER and DER						
Fuel for main heating		Mains g	as			
Fuel factor		1.00 (ma	ains gas)			
Target Carbon Dioxide	18.96			kgCO <sub>2</sub> /m <sup>2</sup>		
Dwelling Carbon Dioxi	18.44			kgCO <sub>2</sub> /m <sup>2</sup>	Pass	
		-0.52 (-2	.7%)		kgCO <sub>2</sub> /m <sup>2</sup>	
b TFEE and DFEE						
Target Fabric Energy Efficiency (TFEE)		55.45			kWh/m²/yr	
Dwelling Fabric Energy Efficiency (DFEE)		49.11			kWh/m²/yr	
		-6.3 (-11	.4%)		kWh/m²/yr	Pass
riterion 2 – Limits on de	sign flexibility					
<b>Limiting Fabric Standa</b>	rds					
2 Fabric U-values						
Element	Ave	erage		Highest		
External wall	0.1	0.19 (max. 0.30)		0.19 (max. 0.70)		Pass
Party wall	0.0	0 (max. 0.20)		-		Pass
Floor	0.1	0.14 (max. 0.25)		0.14 (max. 0.7	0)	Pass
Roof	0.1	0.11 (max. 0.20)		0.12 (max. 0.3	5)	Pass
Openings	1.4	1.40 (max. 2.00)			0)	Pass
2a Thermal bridging						
Thermal bridging c	alculated from linear th	ermal transmit	tances for each	junction		
3 Air permeability		,				
Air permeability at	7.00 (de	7.00 (design value)			m³/(h.m²) @ 50 Pa	
Maximum		10.0	<u> </u>		m³/(h.m²) @ 50 Pa Pass	
	encies				/( ./ 0.501.	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



**4 Heating efficiency** 

Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

# **BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)**



Main heating system	Boiler system with radiators or underfloor - Mains gas Data from database Vaillant ecoFIT sustain 835 VUW 356/6-3 (H-GB) Combi boiler Efficiency: 89.3% SEDBUK2009 Minimum: 88.0%	Pass
Secondary heating system	None	<u> </u>
5 Cylinder insulation		_
Hot water storage	No cylinder	
6 Controls		
Space heating controls	Programmer, room thermostat and TRVs	Pass
Hot water controls	No cylinder	
Boiler interlock	Yes	Pass
7 Low energy lights		
Percentage of fixed lights with low-energy fittings	100 %	
Minimum	75 %	Pass
8 Mechanical ventilation		
Not applicable		
Criterion 3 – Limiting the effects of heat gains in su	mmer	
9 Summertime temperature		
Overheating risk (East Pennines)	Slight	Pass
Based on:		
Overshading	Average	
Windows facing North	1.45 m², No overhang	
Windows facing East	4.54 m², No overhang	
Windows facing West	6.91 m², No overhang	=
Air change rate Blinds/curtains	2.50 ach	$\exists$
Billius/curtains	Light-coloured curtain or roller blind, closed 50% of daylight hours	
Criterion 4 – Building performance consistent with		_
Party Walls		
Туре	U-value	
Filled Cavity with Edge Sealing	0.00 W/m²K	Pass
Air permeability and pressure testing		
3 Air permeability		
Air permeability at 50 pascals	7.00 (design value) m <sup>3</sup> /(h.m <sup>2</sup> ) @ 50 Pa	
Maximum	10.0 m <sup>3</sup> /(h.m <sup>2</sup> ) @ 50 Pa	Pass
10 Key features		
Party wall U-value	0.00 W/m²K	
Roof U-value	0.11 W/m²K	
Roof U-value	0.12 W/m²K	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19